

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
16 December 2004 (16.12.2004)

PCT

(10) International Publication Number
WO 2004/108331 A2

- (51) International Patent Classification⁷: **B23B**
- (21) International Application Number:
PCT/GB2004/002546
- (22) International Filing Date: 11 June 2004 (11.06.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0313470.7 11 June 2003 (11.06.2003) GB
0321361.8 12 September 2003 (12.09.2003) GB
- (71) Applicant (for all designated States except US): CAM-
BRIDGE CONSULTANTS LTD [GB/GB]; Science Park,
Milton Road, Cambridge CB4 0DW (GB).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): WEBSTER, Craig,
Duncan [GB/GB]; 19 Brook Close, Histon, Cambridge
CB4 9XL (GB).
- (74) Agent: KEITH W NASH & CO; 90-92 Regent Street,
Cambridge CB2 1DP (GB).


- (81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.
- (84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished
upon receipt of that report

[Continued on next page]

(54) Title: HANDWHEEL-OPERATED DEVICE

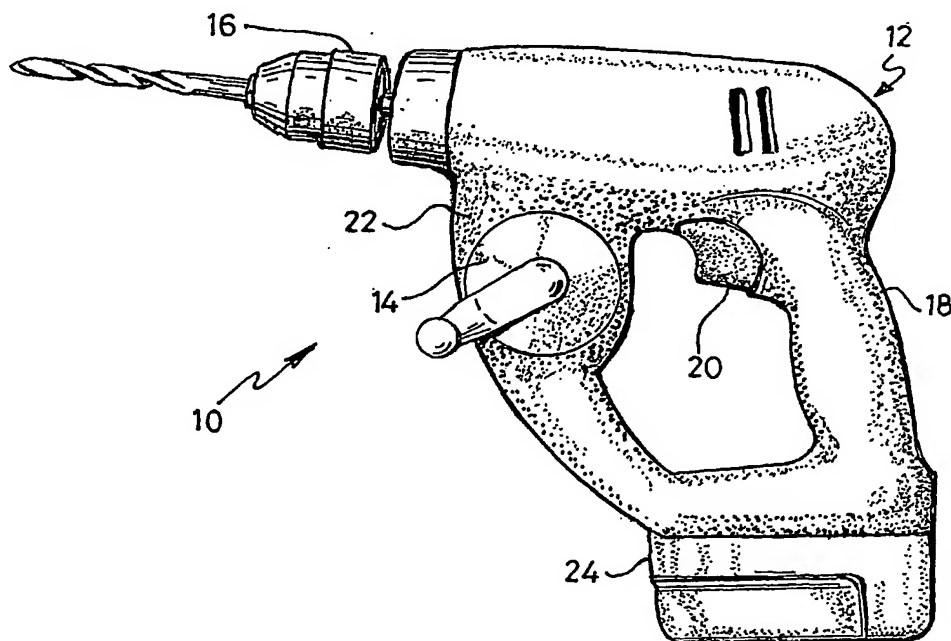

(57) Abstract: A handwheel-operated device comprising a body, a handwheel and a chuck, the handwheel and the chuck being ro-
tatable relative to the body, and the device further comprising a first motor operable to rotate the chuck, first sensor means responsive
to rotation of the handwheel and first control means operable in conjunction with the first sensor means to cause the first motor to
rotate the chuck in dependence upon an angular displacement and/or angular velocity of the handwheel.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.